

Network Working Group  
Internet Draft  
Document: draft-jacquetnet-qos-nlri-04.txt  
Category: Experimental  
Expires September 2002

G. Cristallo  
Alcatel  
C. Jacquenet  
France Telecom R&D  
March 2002

Providing Quality of Service Indication by the BGP-4 Protocol: the  
QOS\_NLRI attribute  
<draft-jacquetnet-qos-nlri-04.txt>

#### Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of Section 10 of RFC 2026 [1].

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts. Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress".

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

NOTE: a PDF version of this document (that includes the figures mentioned in section 7) can be accessed at <http://www.ist-tequila.org>.

#### Abstract

This draft specifies an additional BGP4 (Border Gateway Protocol, version 4, [2]) attribute, named the "QOS\_NLRI" attribute, which aims at providing QoS (Quality of Service)-related information associated to the NLRI (Network Layer Reachability Information) information conveyed in a BGP UPDATE message.

#### 1. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119 [3].

## 2. Introduction

Providing end-to-end quality of service is probably one of the most important challenges of the Internet, not only because of the massive development of value-added IP service offerings, but also because of the various QoS policies that are currently deployed and enforced within an autonomous system, and which may well differ from one AS (Autonomous System) to another.

For almost the last decade, value-added IP service offerings have been deployed over the Internet, thus yielding a dramatic development of the specification effort, as far as quality of service in IP networks is concerned. Nevertheless, providing end-to-end quality of service by crossing administrative domains still remains an issue, mainly because:

- QoS policies may dramatically differ from one service provider to another,
- The enforcement of a specific QoS policy may also differ from one domain to another, although the definition of a set of basic and common quality of service indicators may be shared between the service providers.

Activate the BGP4 protocol for exchanging reachability information between autonomous systems has been a must for many years, and, from this standpoint, the BGP4 protocol is one of the key components for the enforcement of end-to-end QoS policies.

Therefore, exchanging QoS-related information as well as reachability information in a given BGP UPDATE message appears to be helpful in enforcing an end-to-end QoS policy.

This draft aims at specifying a new BGP4 attribute, the QOS\_NLRI attribute, which will convey QoS-related information associated to the routes described in the corresponding NLRI field of the attribute.

This document is organized into the following sections:

- Section 3 identifies the changes that have been made in the document since the last version,
- Section 4 describes the basic requirements that motivate the approach, based upon the use of an additional BGP4 attribute,
- Section 5 describes the attribute and its mode of operation,
- Section 6 elaborates on the use of the capabilities advertisement feature of the BGP4 protocol,

- Section 7 depicts the preliminary results of an ongoing simulation work,
- Finally, sections 8 and 9 introduce IANA and some security considerations, respectively.

### 3. Changes since the last version of this draft

The current version of this draft reflects the following changes:

- Slight re-ordering of the beginning of the document,
- Introduction of a Requirements section (section 4),
- Developed the simulation results section (section 7),
- The References section has been updated,
- Correction of remaining typos.

### 4. Basic requirements

The choice of using the BGP4 protocol for exchanging QoS information between domains is not only motivated by the fact this is currently the only inter-domain (routing) protocol activated in the Internet, but also because the manipulation of attributes is a powerful means for service providers to announce QoS information with the desired level of precision.

The approach presented in this draft has identified the following requirements:

- Keep the approach scalable. The scalability of the approach can be defined in many ways that include the convergence time to reach a consistent view of the network connectivity, the number of route entries that will have to be maintained by a BGP peer, the dynamics of the route announcement mechanism (e.g., how frequently and under which conditions should an UPDATE message containing QoS information be sent?), etc.
- Keep the BGP4 protocol operation unchanged. The introduction of a new attribute should not affect the way the protocol operates, but the information contained in this attribute may very well influence the BGP route selection process.
- Allow for a smooth migration. The use of a specific BGP attribute to convey QoS information should not constrain network operators to migrate the whole installed base at once, but rather help them in gradually deploying the QoS information processing capability.

### 5. The QOS\_NLRI attribute (Type Code XY\*)

(\*): "XY" is subject to the IANA considerations section of this draft.

The QOS\_NLRI attribute is an optional transitive attribute that can be used for the following purposes:

- (a) To advertise a QoS route to a peer. A QoS route is a route that meets one or a set of QoS requirement(s) to reach a given (set of) destination prefixes (see [4], for example). Such QoS requirements can be expressed in terms of minimum one-way delay ([5]) to reach a destination, the experienced delay variation for IP datagrams that are destined to a given destination prefix ([6]), the loss rate experienced along the path to reach a destination, and/or the identification of the traffic that is expected to use this specific route (identification means for such traffic include DSCP (DiffServ Code Point, [7]) marking). These QoS requirements can be used as an input for the route calculation process embedded in the BGP peers, e.g. thanks to the activation of a signaling protocol, such as RSVP (Resource ReSerVation Protocol, [8]),
- (b) To provide QoS information along with the NLRI information in a single BGP UPDATE message. It is assumed that this QoS information will be related to the route (or set of routes) described in the NLRI field of the attribute.

From a service provider's perspective, the choice of defining the QOS\_NLRI attribute as an optional transitive attribute is basically motivated by the fact that this kind of attribute allows for gradual deployment of QoS extensions to BGP4: not all the BGP peers are supposed to be updated accordingly, while partial deployment of such QoS extensions can already provide an added value.

This draft makes no specific assumption about the means to actually value this attribute, since this is mostly a matter of implementation, but the reader is kindly suggested to have a look on document [9], as an example of a means to feed the BGP peer with the appropriate information. The QOS\_NLRI attribute is encoded as follows:

```

+-----+
| QoS Information Code (1 octet)          |
+-----+
| QoS Information Sub-code (1 octet)     |
+-----+
| QoS Information Value (2 octets)       |
+-----+
| QoS Information Origin (1 octet)       |
+-----+
| Address Family Identifier (2 octets)   |
+-----+
| Subsequent Address Family Identifier (1 octet) |
+-----+
    
```

```

+-----+
| Network Address of Next Hop (4 octets) |
+-----+
| Network Layer Reachability Information (variable) |
+-----+
    
```

The use and meaning of the fields of the QOS\_NLRI attribute are defined as follows:

- QoS Information Code:

This field carries the type of the QoS information. The following types have been identified so far:

- (0) Reserved
- (1) Packet rate, i.e. the number of IP datagrams that can be transmitted (or have been lost) per unit of time, this number being characterized by the elaboration provided in the QoS Information Sub-code (see below)
- (2) One-way delay, as defined in [5]
- (3) Inter-packet delay variation, as defined in [6]
- (4) PHB Identifier, as defined in [10]

- QoS Information Sub-code:


This field carries the sub-type of the QoS information. The following sub-types have been identified so far:

- (0) None (i.e. no sub-type, or sub-type unavailable, or unknown sub-type)
- (1) Reserved rate
- (2) Available rate
- (3) Loss rate
- (4) Minimum one-way delay
- (5) Maximum one-way delay
- (6) Average one-way delay

The instantiation of this sub-code field MUST be compatible with the value conveyed in the QoS Information code field, as stated in the following table (the rows represent the QoS Information Code possible values, the columns represent the QoS Information Sub-code values identified so far, while the "X" sign indicates incompatibility).

```


+-----+
|   | 0 | 1 | 2 | 3 | 4 | 5 | 6 |
+-----+
| 0 |   |   |   |   |   |   |   |
+-----+
| 1 |   |   |   |   | X | X | X |
+-----+
| 2 |   | X | X | X |   |   |   |
+-----+
    
```



- QoS Information Value:

This field indicates the value of the QoS information. The corresponding units obviously depend on the instantiation of the QoS Information Code. Namely, if:

- (a) QoS Information Code field is "0", no unit specified,
- (b) QoS Information Code field is "1", unit is kilobits per second (kbps), and the rate encoding rule is composed of a 3-bit exponent (with an assumed base of 8) followed by a 13-bit mantissa, as depicted in the figure below:



This encoding scheme advertises a numeric value that is ( $2^{16} - 1$  - exponential encoding of the considered rate), as depicted in [11].

- (c) QoS Information Code field is "2", unit is milliseconds,
- (d) QoS Information Code field is "3", unit is milliseconds,
- (e) QoS Information Code field is "4", no unit specified.

- QoS Information Origin:

This field provides indication on the origin of the path information, as defined in section 4.3.of [2].

- Address Family Identifier (AFI):

This field carries the identity of the Network Layer protocol associated with the Network Address that follows. Presently defined values for this field are specified in [12] (see the Address Family Numbers section of this reference document).

- Subsequent Address Family Identifier (SAFI):

This field provides additional information about the type of the NLRI carried in the QOS\_NLRI attribute.

- Network Address of Next Hop:

This field contains the IPv4 Network Address of the next router on the path to the destination prefix, (reasonably) assuming

that such routers can at least be addressed according to the IPv4 formalism.

- Network Layer Reachability Information:

This variable length field lists the NLRI information for the feasible routes that are being advertised by this attribute. The next hop information carried in the QOS\_NLRI path attribute defines the Network Layer address of the border router that should be used as the next hop to the destinations listed in the QOS\_NLRI attribute in the UPDATE message.

When advertising a QOS\_NLRI attribute to an external peer, a router may use one of its own interface addresses in the next hop component of the attribute, given the external peer to which the route is being advertised shares a common subnet with the next hop address. This is known as a "first party" next hop information.

A BGP speaker can advertise to an external peer an interface of any internal peer router in the next hop component, provided the external peer to which the route is being advertised shares a common subnet with the next hop address. This is known as a "third party" next hop information.

A BGP speaker can advertise any external peer router in the next hop component, provided that the Network Layer address of this border router was learned from an external peer, and the external peer to which the route is being advertised shares a common subnet with the next hop address. This is a second form of "third party" next hop information.

Normally the next hop information is chosen so that the shortest available path will be taken. A BGP speaker must be able to support disabling advertisement of third party next hop information to handle imperfectly bridged media or for reasons of policy.

A BGP speaker must never advertise an address of a peer to that peer as a next hop, for a route that the speaker is originating. A BGP speaker must never install a route with itself as the next hop.

When a BGP speaker advertises the route to an internal peer, the advertising speaker should not modify the next hop information associated with the route. When a BGP speaker receives the route via an internal link, it may forward packets to the next hop address if the address contained in the attribute is on a common subnet with the local and remote BGP speakers.

A BGP UPDATE message that carries the QOS\_NLRI MUST also carry the ORIGIN and the AS\_PATH attributes (both in eBGP and in iBGP exchanges). Moreover, in iBGP exchanges such a message MUST also carry the LOCAL\_PREF attribute. If such a message is received from an external peer, the local system shall check whether the leftmost AS

in the AS\_PATH attribute is equal to the autonomous system number of the peer than sent the message. If that is not the case, the local system shall send the NOTIFICATION message with Error Code UPDATE Message Error, and the Error Sub-code set to Malformed AS\_PATH.

An UPDATE message that carries no NLRI, other than the one encoded in the QOS\_NLRI attribute, should not carry the NEXT\_HOP attribute. If such a message contains the NEXT\_HOP attribute, the BGP speaker that receives the message should ignore this attribute.

## 6. Use of Capabilities Advertisement with BGP-4

A BGP speaker that uses the QOS\_NLRI attribute SHOULD use the Capabilities Advertisement procedures, as defined in [13], so that it might be able to determine if it can use such an attribute with a particular peer.

The fields in the Capabilities Optional Parameter are defined as follows:

- The Capability Code field is set to N ( $127 < N < 256$ , when considering the "Private Use" range, as specified in [14]), while the Capability Length field is set to "1".
- The Capability Value field is a one-octet field, which contains the Type Code of the QOS\_NLRI attribute, as defined in the introduction of section 4 of the present draft.

## 7. Preliminary simulation results

### 7.1. A phased approach

The simulation work that has begun within the context of the TEQUILA project (see [4]) basically aims at qualifying the scalability of the usage of the QOS\_NLRI attribute for propagating QoS-related information between domains. This work also aims at quantifying the added value provided by the QoS extensions to BGP4, as a function of the percentage of the accordingly updated BGP peers.

This effort has also been launched to focus on the impact on the stability of the BGP routes, by defining a set of basic engineering rules for the introduction of new QoS information, as well as design considerations for the calculation of "QoS routes".

This ongoing development effort is organized into a step-by-step approach, which consists in the following phases:

1. Model an IP network composed of several autonomous systems. Since this simulation effort is primarily focused on the qualification of the scalability related to the use of the QOS\_NLRI attribute for exchanging QoS-related information between domains, it has been decided that the internal



architecture of such domains be kept very simple, i.e. without any specific IGP interaction,

2. Within this IP network, there are BGP peers that are QOS\_NLRI aware, i.e. they have the ability to process the information conveyed in the attribute, while the other routers do not: these routers do not recognize the QOS\_NLRI attribute by definition, and they will forward the information to other peers, by setting the Partial bit in the attribute, meaning that the information conveyed in the message is incomplete. This approach allows to elaborate on the added value introduced by a gradual deployment of the QoS extensions to BGP4,
3. As far as QOS\_NLRI aware BGP peers are concerned, they will process the information contained in the QOS\_NLRI attribute to possibly influence the route decision process, thus yielding the selection (and the installation) of distinct routes towards a same destination prefix, depending on the QoS-related information conveyed in the QOS\_NLRI attribute. From this implementation perspective, the BGP routing tables have been modeled so that they contain a "sub-section" where QOS\_NLRI-capable peers will store the information conveyed in the attribute,
4. Modify the BGP route decision process: at this stage of the simulation, the modified decision process relies upon the one-way delay information (which corresponds to the QoS Information Code field of the attribute valued at "2"), and it also takes into account the value of the Partial bit of the attribute.

Once the creation of these components of the IP network has been completed (together with the modification of the BGP route selection process), the behavior of a QOS\_NLRI-capable BGP peer is as follows:

Upon receipt of a BGP UPDATE message that contains the QOS\_NLRI attribute, the router will first check if the corresponding route is already stored in its local RIB, according to the value of the one-way delay information contained in both QoS Information Code and Sub-code fields of the attribute.

If not, the BGP peer will install the route in its local RIB. Otherwise (i.e. an equivalent route already exists in its database), the BGP peer will select the best of both routes according to the following criteria:


- If both routes are said to be either incomplete (Partial bit has been set) or complete (Partial bit is unset), the route with the lowest delay will be selected,
- Otherwise, a route with the Partial bit unset is always preferred over any other route, even if this (complete) route reflects a higher transit delay.

If ever both Partial bit and transit delay information are not sufficient to make a decision, the standard BGP decision process (according to the breaking ties mechanism depicted in [2]) is performed.

7.2. A case study


As stated in the previous section 7.1, the current status of the simulation work basically relies upon the one-way transit delay information only, as well as the complete/incomplete indication of the Partial bit conveyed in the QOS\_NLRI attribute.

The IP network has been modeled so that it is composed of 6 autonomous systems and 11 BGP peers. Future scenarios will be composed of more ASs. The following figures depict the actual processing of the QoS-related information conveyed in the QOS\_NLRI attribute, depending on whether the peer is QOS\_NLRI-aware or not.

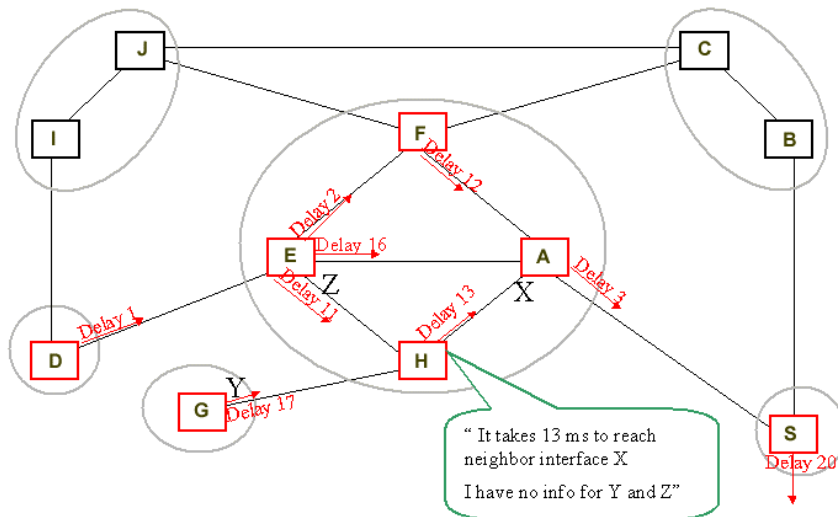

- Figure 1: a case study. -

Figure 1 depicts the modelled network for a first case study, while figure 2 depicts the propagation of a BGP UPDATE message that contains the QOS\_NLRI attribute, in the case where the contents of the attribute are changed, because of complete/incomplete conditions depicted by the Partial bit of the QOS\_NLRI attribute.

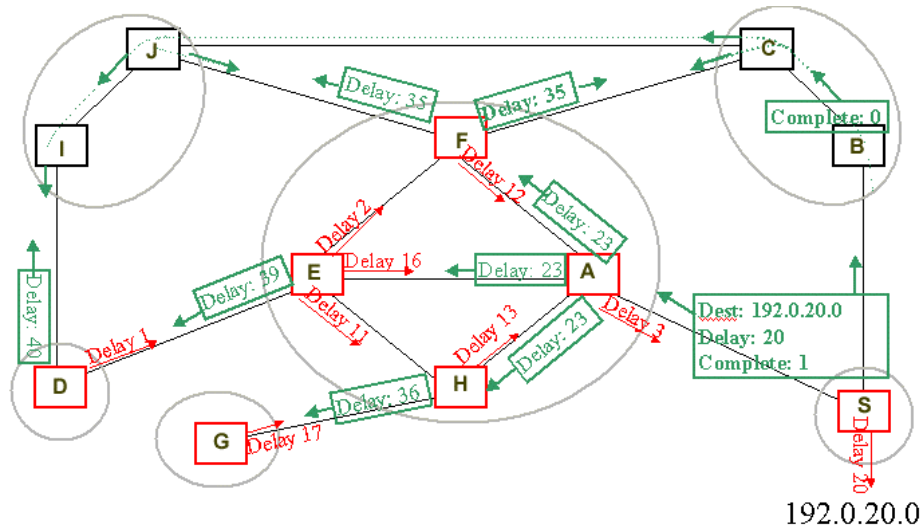


- Figure 2: propagation of one-way delay information via BGP4. -

Router S in figure 2 is a QOS\_NLRI-capable speaker. It takes 20 milliseconds to node S to reach network 192.0.20.0: this information will be conveyed in a QOS\_NLRI attribute that will be sent by node S in a BGP UPDATE message with the Partial bit of the QOS\_NLRI attribute unset.

Router A is another QOS\_NLRI BGP peer, and it takes 3 milliseconds for A to reach router S. Node A will update the QoS-related information of the QOS\_NLRI attribute, indicating that, to reach network 192.0.20.0, it takes 23 milliseconds. Router A will install this new route in its database, and will propagate the corresponding UPDATE message to its peers.

On the other hand, router B is not capable of processing the information conveyed in the QOS\_NLRI attribute, and it will therefore set the Partial bit of the QOS\_NLRI attribute in the corresponding UPDATE message, leaving the one-way delay information detailed in both QoS Information Code and Sub-code unchanged.

Upon receipt of the UPDATE message sent by router A, router E will update the one-way delay information since it is a QOS\_NLRI-capable peer. Finally, router D receives the UPDATE message, and selects a route with a 40 milliseconds one-way delay to reach network 192.0.20.0, as depicted in figure 3.

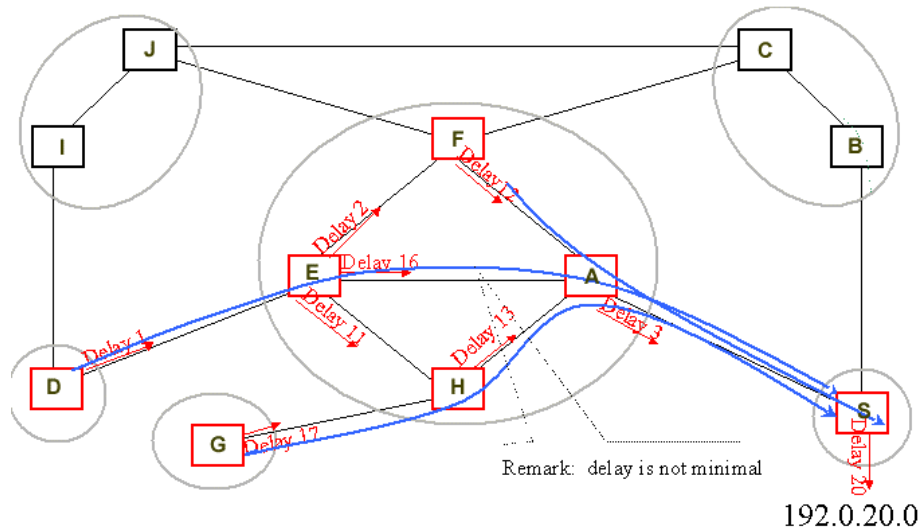

- Figure 3: selecting QoS routes across domains. -

This simulation result shows that the selection of a delay-based route over a BGP route (as depicted in [2]) may not yield an optimal decision. In the above example, the 40 ms-route goes through routers D-E-A-S, while a "truly optimal" BGP route would be through routers D-E-F-A-S, hence a 38 ms-route. This is because of a BGP4 rule that does not allow router F to send an UPDATE message towards router E, because router F received the UPDATE message from router A thanks to the iBGP connection it has established with A.

These basic observations confirm that the enforcement of a QoS policy between domains by using the BGP4 protocol is obviously conditioned by the BGP4 routing policies that are enforced within each domain.

### 7.3. Preliminary results

The following table reflects the first results obtained from a simulation network composed of 9 autonomous systems and 20 BGP peers. The numbers contained in the columns reflect the percentage of serviced requirements, where the requirements are expressed in terms of delay.

Three parameters have been taken into account:

- The percentage of BGP peers that have the ability to process the information conveyed in the QOS\_NLRI attribute (denoted as "x% Q-BGP" in the following table),
- The transit delays "observed" (and artificially simulated) on each transmission link: the higher the delays, the lower the percentage of serviced QoS requirements,
- The QoS requirements themselves, expressed in terms of delay: as such, the strongest requirements (i.e. the lowest delays) have less chance to be satisfied.

Delay	0% Q-BGP	50% Q-BGP	100% Q-BGP
3	11	8,3	11
5	30,5	30,5	36,1
6	40	47,2	55,5
7	47	59,7	72,2
8	62,5	79	91,6
9	63	84,7	97,2
10	70,8	90,2	98,6
11	76,3	93	98,6
12	86,1	97,2	100
13	88,8	98,6	100
14	94,4	100	100
15	94,4	100	100
16	94,4	100	100
17	97,2	100	100
18	98,6	100	100
19	98,6	100	100
20	98,6	100	100
21	98,6	100	100
22	100	100	100

While this table demonstrates the technical feasibility of the approach (and how the use of the QOS\_NLRI attribute can improve the percentage of serviced QoS requirements), the results presented here remain obviously preliminary, as discussed in the next section.

#### 7.4. Next steps

The above-mentioned simulation effort will be pursued in order to better qualify the interest of using the BGP4 protocol to convey QoS-

related information between domains, from a scalability perspective, i.e. the increase of BGP traffic vs. the stability of the network.

The stability of the IP network is probably one of the most important aspects, since QoS-related information is subject to very dynamic changes, thus yielding non-negligible risks of flapping.

It is therefore expected that the upcoming versions of this draft will reflect the progress of this simulation work, which will take into account additional autonomous systems, among other tracks of evolution.

#### 8. IANA Considerations

Section 5 of this draft documents an optional transitive BGP-4 attribute named "QOS\_NLRI" whose type value will be assigned by IANA. Section 6 of this draft also documents a Capability Code whose value should be assigned by IANA.

#### 9. Security Considerations

This additional BGP-4 attribute specification does not change the underlying security issues inherent in the existing BGP-4 protocol specification [15].

#### 10. References

- [1]Bradner, S., "The Internet Standards Process -- Revision 3", BCP 9, RFC 2026, October 1996.
- [2]Rekhter, Y., Li T., "A Border Gateway Protocol 4 (BGP-4)", RFC 1771, March 1995.
- [3]Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997.
- [4]Goderis, D., T'Joens, Y., Jacquenet, C., Memenios, G., Pavlou, G., Egan, R., Griffin, D., Georgatsos, P., Georgiadis, L., "Specification of a Service Level Specification (SLS) Template", draft-tequila-sls-01.txt, Work in Progress, June 2001. Check <http://www.ist-tequila.org> for additional information.
- [5]Almes, G., Kalidindi, S., "A One-Way-Delay Metric for IPPM", RFC 2679, September 1999.
- [6]Demichelis, C., Chimento, P., "IP Packet Delay Variation Metric for IPPM", draft-ietf-ippm-ipdv-08.txt, Work in Progress, November 2001.

- [7]Nichols, K., Blake, S., Baker, F., Black, D., "Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers", RFC 2474, December 1998.
- [8]Braden, R., et al., "Resource ReSerVation Protocol (RSVP)- Version 1 Functional Specification", RFC 2205, September 1997.
- [9]Jacquenet, C., "A COPS client-type for IP traffic engineering", draft-jacquenet-ip-te-cops-02.txt, Work in Progress, June 2001.
- [10]Black, D., Brim, S., Carpenter, B., Le Faucheur, F., "Per Hop Behavior Identification Codes", RFC 3140, June 2001.
- [11]Apostolopoulos, G. et al, "QoS Routing Mechanisms and OSPF Extensions", RFC 2676, August 1999.
- [12]Reynolds, J., Postel, J., "ASSIGNED NUMBERS", RFC 1700, October 1994.
- [13]Chandra, R., Scudder, J., "Capabilities Advertisement with BGP-4", RFC 2842, May 2000.
- [14]Narten, T., Alvestrand, H., "Guidelines for Writing an IANA Considerations Section in RFCs", RFC 2434, October 1998.
- [15]Heffernan, A., "Protection of BGP sessions via the TCP MD5 Signature Option", RFC 2385, August 1998.

## 11. Acknowledgments

Part of this work is funded by the European Commission, within the context of the TEQUILA (Traffic Engineering for Quality of Service in the Internet At Large Scale, [4]) project, which is itself part of the IST (Information Society Technologies) research program.

The author would also like to thank all the partners of the TEQUILA project for the fruitful discussions that have been conducted within the context of the traffic engineering specification effort of the project, as well as O. Bonaventure and B. Carpenter for their valuable input.

## 12. Authors' Addresses

Geoffrey Cristallo  
Alcatel  
Francis Wellesplein, 1  
2018 Antwerp  
Belgium  
Phone: +32 (0)3 240 7890  
E-Mail: geoffrey.cristallo@alcatel.be

Christian Jacquenet  
France Telecom R & D  
DMI/SIR  
42, rue des Coutures  
BP 6243  
14066 Caen Cedex 4  
France  
Phone: +33 2 31 75 94 28  
E-Mail: christian.jacquenet@rd.francetelecom.com

### 13. Full Copyright Statement

Copyright(C) The Internet Society (2002). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.